


Electrical Metallic Tubing (EMT) Elbows

EMT 90° Elbows

Listed to Underwriters Laboratories Safety Standard UL 797
Manufactured in accordance with ANSI C80.3



| Trade Size | Metric Designator | Radius (A) ¹ | | Offset (B) ² | | Straight (D) ¹ | | Approximate Weight Per 100 Pieces | | Standard Package |
|------------|-------------------|-------------------------|-----|-------------------------|-----|---------------------------|-----|-----------------------------------|-------|------------------|
| | | in. | mm. | in. | mm. | in. | mm. | lb. | kg. | |
| 1/2 | 16 | 4 | 102 | 5 7/8 | 149 | 1 1/2 | 38 | 25 | 11.3 | 25 |
| 3/4 | 21 | 4 1/2 | 114 | 7 | 178 | 1 1/2 | 38 | 46 | 20.9 | 50 |
| 1 | 27 | 5 3/4 | 146 | 8 3/4 | 222 | 1 7/8 | 48 | 84 | 38.1 | 25 |
| 1 1/4 | 35 | 7 1/4 | 184 | 10 1/8 | 257 | 2 | 51 | 144 | 65.3 | 20 |
| 1 1/2 | 41 | 8 1/4 | 210 | 11 3/4 | 298 | 2 | 51 | 193 | 87.5 | 15 |
| 2 | 53 | 9 1/2 | 241 | 14 | 356 | 2 | 51 | 296 | 134.3 | 10 |
| 2 1/2 | 63 | 10 1/2 | 267 | 16 1/4 | 413 | 3 | 76 | 504 | 228.6 | 1 |
| 3 | 78 | 13 | 330 | 18 3/4 | 476 | 3 1/8 | 79 | 701 | 318.0 | 1 |
| 3 1/2 | 91 | 15 | 381 | 21 1/4 | 540 | 3 1/4 | 83 | 1047 | 474.9 | 1 |
| 4 | 103 | 16 | 406 | 23 3/8 | 594 | 3 3/8 | 86 | 1310 | 594.2 | 1 |



¹Minimum requirement as per UL Standard
²Dimensions and weights are approximate


Sizes 2 1/2 (63) and larger shipped in palletized cartons or bulk.
Also available in the following Degrees (60°, 45°, 30°, 22 1/2°, 15° & 11 1/4°)

EMT 45° Elbows

Listed to Underwriters Laboratories Safety Standard UL 797
Manufactured in accordance with ANSI C80.3



| Trade Size | Metric Designator | Radius (A) ¹ | | Offset (B) ² | | Offset (C) ² | | Straight (D) ¹ | | Approximate Weight Per 100 Pieces | | Standard Package |
|------------|-------------------|-------------------------|-----|-------------------------|-----|-------------------------|-----|---------------------------|-----|-----------------------------------|-------|------------------|
| | | in. | mm. | in. | mm. | in. | mm. | in. | mm. | lb. | kg. | |
| 1/2 | 16 | 4 | 102 | 6 1/8 | 156 | 2 1/2 | 64 | 1 1/2 | 38 | 18 | 8.2 | 25 |
| 3/4 | 21 | 4 1/2 | 114 | 7 3/8 | 187 | 3 1/8 | 79 | 1 1/2 | 38 | 33 | 15.0 | 50 |
| 1 | 27 | 5 3/4 | 146 | 8 3/4 | 222 | 3 5/8 | 92 | 1 7/8 | 48 | 56 | 25.4 | 25 |
| 1 1/4 | 35 | 7 1/4 | 184 | 10 1/8 | 257 | 4 1/8 | 105 | 2 | 51 | 97 | 44.0 | 20 |
| 1 1/2 | 41 | 8 1/4 | 210 | 13 1/8 | 333 | 5 3/8 | 137 | 2 | 51 | 145 | 65.8 | 15 |
| 2 | 53 | 9 1/2 | 241 | 13 1/8 | 333 | 5 1/2 | 140 | 2 | 51 | 185 | 83.9 | 10 |
| 2 1/2 | 63 | 10 1/2 | 267 | 17 1/2 | 445 | 7 1/4 | 184 | 3 | 76 | 360 | 163.3 | 1 |
| 3 | 78 | 13 | 330 | 17 1/2 | 445 | 7 1/4 | 184 | 3 1/8 | 79 | 438 | 198.7 | 1 |
| 3 1/2 | 91 | 15 | 381 | 26 1/8 | 664 | 10 7/8 | 276 | 3 1/4 | 83 | 873 | 396.0 | 1 |
| 4 | 103 | 16 | 406 | 26 1/4 | 667 | 10 7/8 | 276 | 3 3/8 | 86 | 983 | 445.9 | 1 |

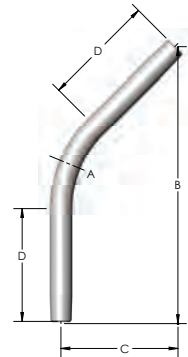

¹Minimum requirement as per UL Standard
²Dimensions and weights are approximate

Sizes 2 1/2 (63) and larger shipped in palletized cartons or bulk.
Also available in the following Degrees (90°, 60°, 30°, 22 1/2°, 15° & 11 1/4°)

NOTE: Special orders are non-cancelable, non-returnable and non-refundable.

800.882.5543

Electrical Metallic Tubing (EMT) Elbows


EMT Large Radius 90° Elbows

Listed to Underwriters Laboratories Safety Standard UL 797

Manufactured in accordance with ANSI C80.3



| Trade Size | Metric Designator | Radius (A) ¹ | | Offset (B) ² | | Straight (D) ¹ | | Approximate Weight Per 100 Pieces | |
|------------|-------------------|-------------------------|------|-------------------------|------|---------------------------|-----|-----------------------------------|--------|
| | | in. | mm. | in. | mm. | in. | mm. | lb. | kg. |
| 1 ¼ | 35 | 24 | 610 | 34 ⅝ | 879 | 10 ⅝ | 270 | 497 | 225.4 |
| 1 ¼ | 35 | 36 | 914 | 46 ¾ | 1187 | 10 ¾ | 273 | 657 | 298.0 |
| 1 ¼ | 35 | 48 | 1219 | 60 ¼ | 1530 | 12 ¼ | 311 | 842 | 381.9 |
| 1 ½ | 41 | 24 | 610 | 34 ⅝ | 879 | 10 ⅝ | 270 | 570 | 258.6 |
| 1 ½ | 41 | 36 | 914 | 46 ¾ | 1187 | 10 ¾ | 273 | 754 | 342.0 |
| 1 ½ | 41 | 48 | 1219 | 60 ¼ | 1530 | 12 ¼ | 311 | 967 | 438.6 |
| 2 | 53 | 24 | 610 | 34 ⅝ | 879 | 10 ⅝ | 270 | 728 | 330.2 |
| 2 | 53 | 30 | 762 | 41 | 1041 | 11 | 279 | 851 | 386.0 |
| 2 | 53 | 36 | 914 | 46 ¾ | 1187 | 10 ¾ | 273 | 962 | 436.4 |
| 2 | 53 | 48 | 1219 | 60 ¼ | 1530 | 12 ¼ | 311 | 1233 | 559.3 |
| 2 ½ | 63 | 24 | 610 | 34 ⅝ | 879 | 10 ⅝ | 270 | 1062 | 481.7 |
| 2 ½ | 63 | 36 | 914 | 46 ¾ | 1187 | 10 ¾ | 273 | 1404 | 636.9 |
| 2 ½ | 63 | 48 | 1219 | 60 ¼ | 1530 | 12 ¼ | 311 | 1800 | 816.5 |
| 3 | 78 | 24 | 610 | 34 ⅝ | 879 | 10 ⅝ | 270 | 1293 | 586.5 |
| 3 | 78 | 30 | 762 | 41 | 1041 | 11 | 279 | 1512 | 685.8 |
| 3 | 78 | 36 | 914 | 46 ¾ | 1187 | 10 ¾ | 273 | 1710 | 775.7 |
| 3 | 78 | 48 | 1219 | 60 ¼ | 1530 | 12 ¼ | 311 | 2192 | 994.3 |
| 3 ½ | 91 | 24 | 610 | 34 ⅝ | 879 | 10 ⅝ | 270 | 1716 | 778.4 |
| 3 ½ | 91 | 30 | 762 | 41 | 1041 | 11 | 279 | 2007 | 910.4 |
| 3 ½ | 91 | 36 | 914 | 46 ¾ | 1187 | 10 ¾ | 273 | 2269 | 1029.2 |
| 3 ½ | 91 | 48 | 1219 | 60 ¼ | 1530 | 12 ¼ | 311 | 2908 | 1319.1 |
| 4 | 103 | 24 | 610 | 34 ⅝ | 879 | 10 ⅝ | 270 | 1932 | 876.4 |
| 4 | 103 | 30 | 762 | 41 | 1041 | 11 | 279 | 2260 | 1025.1 |
| 4 | 103 | 36 | 914 | 46 ¾ | 1187 | 10 ¾ | 273 | 2555 | 1158.9 |
| 4 | 103 | 48 | 1219 | 60 ¼ | 1530 | 12 ¼ | 311 | 3275 | 1485.5 |



¹For information only, not a requirement as per UL Standard

Sizes 2 ½ (63) and larger shipped in palletized cartons or bulk.

Also available in the following Degrees (60°, 45°, 30°, 22 ½°, 15° & 11 ¼°)

NOTE: Special orders are non-cancelable, non-returnable and non-refundable.

Electrical Metallic Tubing (EMT) Elbows


EMT Large Radius 45° Elbows

Listed to Underwriters Laboratories Safety Standard UL 797

Manufactured in accordance with ANSI C80.3



| Trade Size | Metric Designator | Radius (A) ¹ | | Offset (B) ² | | Offset (C) ² | | Straight (D) ¹ | | Approximate Weight Per 100 Pieces | |
|------------|-------------------|-------------------------|------|-------------------------|------|-------------------------|-----|---------------------------|-----|-----------------------------------|-----|
| | | in. | mm. | in. | mm. | in. | mm. | in. | mm. | lb. | kg. |
| 1 ¼ | 35 | 24 | 610 | 36 | 914 | 15 | 381 | 11 | 279 | 370 | 167 |
| 1 ¼ | 35 | 36 | 914 | 44 | 1118 | 18 ½ | 470 | 11 | 279 | 410 | 185 |
| 1 ¼ | 35 | 48 | 1219 | 54 ½ | 1384 | 22 ½ | 572 | 12 | 305 | 520 | 234 |
| 1 ½ | 41 | 24 | 610 | 36 | 914 | 15 | 381 | 11 | 279 | 410 | 185 |
| 1 ½ | 41 | 36 | 914 | 44 | 1118 | 18 ½ | 470 | 11 | 279 | 510 | 230 |
| 1 ½ | 41 | 48 | 1219 | 54 ½ | 1384 | 22 ½ | 572 | 12 | 305 | 600 | 270 |
| 2 | 53 | 24 | 610 | 36 | 914 | 15 | 381 | 11 | 279 | 510 | 230 |
| 2 | 53 | 30 | 762 | 40 | 1016 | 17 | 432 | 11 | 279 | 590 | 266 |
| 2 | 53 | 36 | 914 | 44 | 1118 | 18 ½ | 470 | 11 | 279 | 590 | 266 |
| 2 | 53 | 48 | 1219 | 54 ½ | 1384 | 22 ½ | 572 | 12 | 305 | 760 | 342 |
| 2 ½ | 63 | 24 | 610 | 36 | 914 | 15 | 381 | 11 | 279 | 580 | 261 |
| 2 ½ | 63 | 36 | 914 | 44 | 1118 | 18 ½ | 470 | 11 | 279 | 850 | 383 |
| 2 ½ | 63 | 48 | 1219 | 54 ½ | 1384 | 22 ½ | 572 | 12 | 305 | 1110 | 500 |
| 3 | 78 | 24 | 610 | 36 | 914 | 15 | 381 | 11 | 279 | 880 | 396 |
| 3 | 78 | 30 | 762 | 40 | 1016 | 17 | 432 | 11 | 279 | 950 | 428 |
| 3 | 78 | 36 | 914 | 44 | 1118 | 18 ½ | 470 | 11 | 279 | 1020 | 459 |
| 3 | 78 | 48 | 1219 | 54 ½ | 1384 | 22 ½ | 572 | 12 | 305 | 1360 | 612 |
| 3 ½ | 91 | 24 | 610 | 36 | 914 | 15 | 381 | 11 | 279 | 1130 | 509 |
| 3 ½ | 91 | 30 | 762 | 40 | 1016 | 17 | 432 | 11 | 279 | 1160 | 522 |
| 3 ½ | 91 | 36 | 914 | 44 | 1118 | 18 ½ | 470 | 11 | 279 | 1390 | 626 |
| 3 ½ | 91 | 48 | 1219 | 54 ½ | 1384 | 22 ½ | 572 | 12 | 305 | 1800 | 810 |
| 4 | 103 | 24 | 610 | 36 | 914 | 15 | 381 | 11 | 279 | 1300 | 585 |
| 4 | 103 | 30 | 762 | 40 | 1016 | 17 | 432 | 11 | 279 | 1560 | 702 |
| 4 | 103 | 36 | 914 | 44 | 1118 | 18 ½ | 470 | 11 | 279 | 1600 | 720 |
| 4 | 103 | 48 | 1219 | 54 ½ | 1384 | 22 ½ | 572 | 12 | 305 | 2030 | 914 |

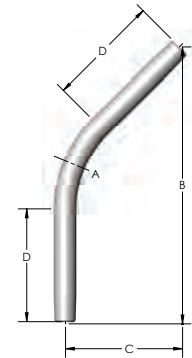

¹For information only, not a requirement as per UL Standard
 Sizes 2 ½ (63) and larger shipped in palletized cartons or bulk.
 Also available in the following Degrees (60°, 45°, 30°, 22 ½°, 15° & 11 ¼°)

NOTE: Special orders are non-cancelable, non-returnable and non-refundable.

800.882.5543