

Features

- Compact depth for use in raceway, delivery systems and where space is limited
- 2 stainless steel ports rated for 10,000 insertions and removals
- Switch activated port door; when open enables power; when closed, all power is switched off, for a “zero” no-load draw
- Bidirectional clamp wiring allows horizontal or back entry of solid or stranded wire
- Compatible with USB 1.1/2.0/3.0 devices, including Apple® products

Ordering Information

| Description  | Device Color | UPC          | Catalog Number |
|--|--------------|--------------|----------------|
| USB charger 2 port outlet, type A 2.0 ports, 3 Amp, 5 Volt DC, Style Line® decorator | Ivory        | 883778305207 | USB2I          |

Listings


cULus to UL 1310

Specifications

|                            |                          |
|----------------------------|--------------------------|
| Face                       | Thermoplastic            |
| Base                       | Reinforced Thermoplastic |
| LED                        | Green Indicator          |
| Mounting Strap             | Galvanized steel         |
| Auto Self-grounding staple | Stainless steel          |
| Mounting Screws            | Zinc plated steel        |
| Terminal Screws            | Plated Steel #8          |
| USB Port                   | Stainless Steel          |

Performance

|                         |  |
|-------------------------|--|
| <b>Electrical</b>       |  |
| Dielectric Voltage      | Withstands 1,500V minimum                                    |
| Feed-Through            | Circuit feed-through 20 Amp, 125 Volt                        |
| Rating                  | 3A, 5V DC  |
| <b>Mechanical</b>       |  |
| Product Identification  | Ratings are a permanent part of the device                   |
| Terminal Accommodation  | #14-#10 AWG copper stranded or solid conductor only          |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA       |
| USB Port                | Stainless steel Rated for 10,000 plug insertions and removal |
| <b>Environmental</b>    |  |
| Flammability            | UL 5VA   |
| Operating Temperature   | Maximum continuous 75°C; minimum -40°C (w/o impact)          |

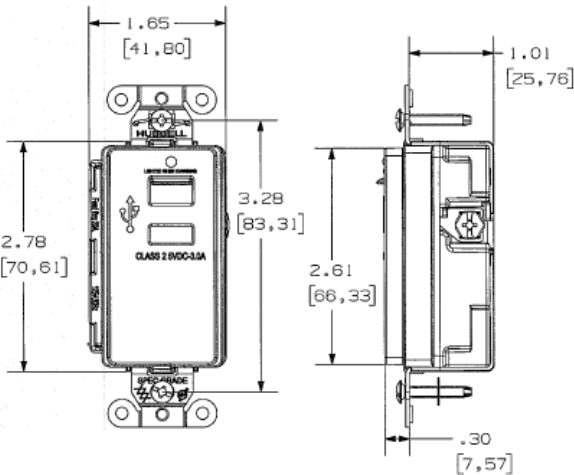

Online Resources

eCatalog