


135A Continuous Meter Mounting Equipment

Residential^{①②}, 4 & 5 terminal for 1 phase, 3 wire

| Cont. amp rating | Service | Connectors Line | Load | Dimensions (in.) W H D | | | Hub opening | Bypass | No. of term. | Catalog number |
|---|---------|-----------------|---------|---------------------------|------|-----|-----------------|--------|--------------|--------------------------|
| 135 | UG | #14-2/0 | #14-2/0 | 8.0 | 11.7 | 3.6 | Blank Top | None | 4 | UAT111-PG |
| Approved for MidAmerican Energy | | | | | | | | | | |
| 135 | OH/UG | #14-2/0 | #14-2/0 | 8.0 | 11.7 | 3.6 | RX Opening | None | 4 | UAT111-OG |
| 135 | OH | #14-2/0 | #14-2/0 | 8.0 | 11.7 | 3.6 | 1" Installed | None | 4 | UAT111-AG |
| 135 | OH | #14-2/0 | #14-2/0 | 8.0 | 11.7 | 3.6 | 1.25" Installed | None | 4 | UAT111-BG |
| Approved for MidAmerican Energy, Alliant, Adams-Columbia Elec. COOP, Madison G&E, WEPCO and Wisconsin Public Service | | | | | | | | | | |
| 135 | OH/UG | #14-2/0 | #14-2/0 | 8.0 | 11.7 | 3.6 | RX Opening | Horn | 4 | UAT111-OPQG |
| 135 | OH | #14-2/0 | #14-2/0 | 8.0 | 11.7 | 3.6 | 1.25" Installed | Horn | 4 | UAT111-BPQG |
| Approved for MidAmerican Energy, Adams-Columbia Elec. COOP and Wisconsin Public Service | | | | | | | | | | |
| 135 | OH/UG | #14-2/0 | #14-2/0 | 8.0 | 11.7 | 3.6 | RX Opening | Horn | 4 | UAT111-OPZA ^④ |
| Approved for Alliant and Adams-Columbia Elec. COOP | | | | | | | | | | |
| 135 | OH/UG | #14-2/0 | #14-2/0 | 8.0 | 11.7 | 3.6 | RX Opening | Horn | 4 | UAT111-OP |
| Approved for Adams-Columbia Elec. COOP and Wisconsin Public Service | | | | | | | | | | |
| 135 | OH/UG | #14-2/0 | #14-2/0 | 8.0 | 11.7 | 3.6 | RX Opening | Horn | 4 | UAT111-OPZ ^③ |

- ① All units include a quad neutral.
 ② 5th terminal kit for field installation: H659-0121.
 ③ Includes cardboard meter opening cover.
 ④ 7/16" barrel lock KO and bracket.
 See accessories page in back.

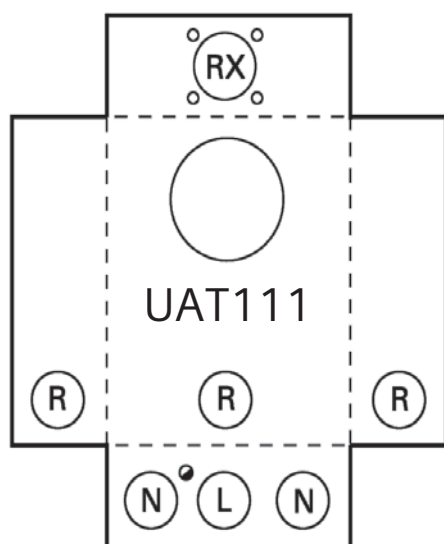

UAT111-OPGP

| Knockouts (inches): | |
|---------------------|---------------------------|
| Ø: | 1/4 |
| L: | 1/2, 3/4, 1, 1-1/4, 1-1/2 |
| N: | 3/4, 1, 1-1/4, 1-1/2, 2 |
| R: | 1, 1-1/4, 1-1/2, 2 |
| RX: | Ø2.750 HUB OP |